


ELEVATION

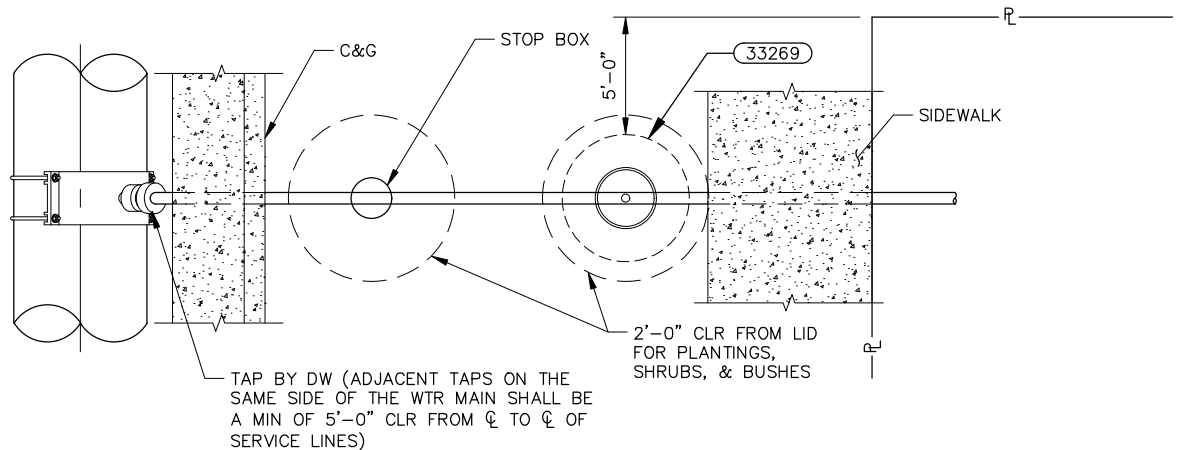

PLAN

NOTES:

1. IF THERE IS A TREE LAWN BETWEEN THE CURB AND SIDEWALK, INSTALL THE STOP BOX AND THE METER SETTING IN THE TREE LAWN. IF NO TREE LAWN EXISTS, AND THE SIDEWALK IS ADJACENT TO THE BACK OF THE CURB, THE CURB STOP BOX SHALL BE 6 INCHES TO 12 INCHES FROM THE BACK SIDE OF THE SIDEWALK.
2. LOCATE THE STOP BOX IN A PUBLIC RIGHT-OF-WAY, 6 INCHES TO 12 INCHES FROM THE BACKSIDE OF THE CURB OR SIDEWALK, IN A LANDSCAPED AREA, 24 INCHES FROM THE INLET SIDE OF THE METER PIT UNLESS PRIOR APPROVAL IS OBTAINED FROM THE DENVER WATER METER INSPECTOR. FOR A CURB STOP LOCATED BENEATH PAVEMENT, USE A ROADWAY BOX OVER A STANDARD STOP BOX WITH A BOND BREAKER. THE CURB STOP CANNOT BE LOCATED BENEATH PARKING AREAS.
3. INSTALL METER PIT AND SERVICE LINE IN ACCORDANCE WITH SPECIFICATION SECTION 33 19 13.

DRAWN BY: <i>BAIRES</i>
CHKD BY: <i>K ROSS/</i>
APPD BY:
ORIGINATION DATE: <i>JANUARY 2021</i>
REVISION DATE:

33264
3/4" & 1" SERVICE LINE,
STOP BOX, & OUTSIDE
METER INSTALLATION

DENVER WATER
1600 West 12th Ave
Denver, Colorado 80204-3412
T: 303.628.6000
F: 303.628.6851
denverwater.org