


PLAN

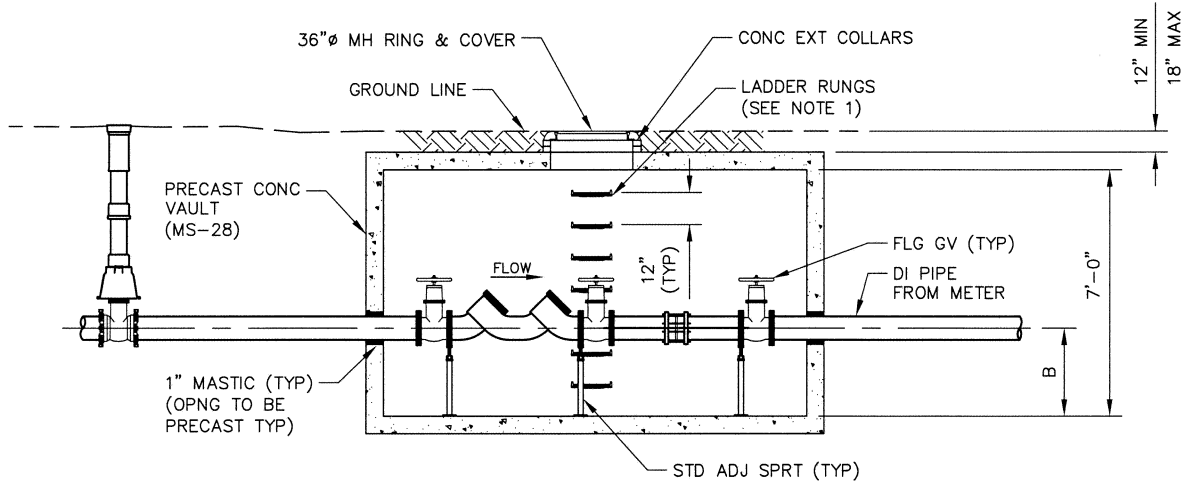

ELEVATION

NOMINAL PIPE Ø	PRECAST VAULT DIMENSIONS		SUMP		
	A	B	C	D	E
2 1/2"	10'-0"	2'-6"	12"Ø	2'-2"	1'-6"
3"	10'-0"	2'-6"	12"Ø	2'-2"	1'-6"
4"	10'-0"	2'-6"	12"Ø	2'-2"	1'-6"
6"	14'-0"	2'-6"	18"Ø	2'-6"	1'-9"
8"	14'-0"	2'-6"	18"Ø	2'-6"	1'-9"
10"	14'-0"	2'-6"	18"Ø	2'-6"	1'-9"

NOTES:

1. THE DISTANCE BETWEEN RUNGS, CLEATS, AND STEPS SHALL BE UNIFORM THROUGHOUT THE LENGTH OF THE LADDER.
2. VALVES INSIDE THE VAULT SHALL BE NON RISING STEM, RIGHT HAND OPEN VALVES WITH HAND WHEEL OPERATORS.
3. SERVICE LINES SHALL NOT CROSS INSIDE THE METER PIT.

OUTSIDE SETTING FOR 2 1/2" TO 10" DOUBLE CHECK VALVE ASSEMBLY IN VAULT

Scale: NONE Date: May 2018

Drawn: RLB Ck: K ROSS

Approved: [Signature] Dr. 127 No. 35