


**STRAIGHT
CUL-DE-SAC**

LAY PIPE TO 18'-0"
BEYOND THE CENTER
(RADIUS POINT)
OF THE CUL-DE-SAC

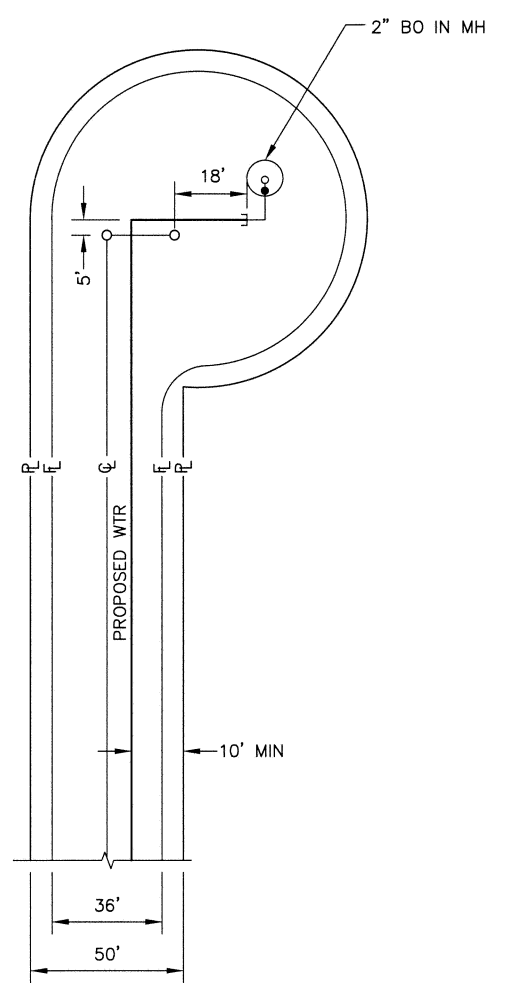

**OFFSET
CUL-DE-SAC**

LAY PIPE TO 5'-0"
BEYOND THE
POINT OF TANGENCY THEN TO 18'-0"
BEYOND THE CENTER (RADIUS POINT)
OF THE CUL-DE-SAC

NOTES:

1. SEE TYPICAL PUBLIC RIGHT-OF-WAY CROSS SECTION, SHEET 4.
2. FIRE HYDRANTS LOCATED AT POINTS OTHER THAN CORNER INTERSECTIONS SHALL BE LOCATED AT A LOT LINE EXTENDED.
3. REFER TO DENVER WATER CAD STANDARDS FOR SYMBOLS AND LEGEND.



**WATER DISTRIBUTION SYSTEM TYPICAL
LAYOUT FOR CUL-DE-SAC**

Scale: NONE Date: May 2018

Drawn: RLB Ck: K ROSS KLR

Approved: [Signature] Dr. 127 No. 35