


PLAN

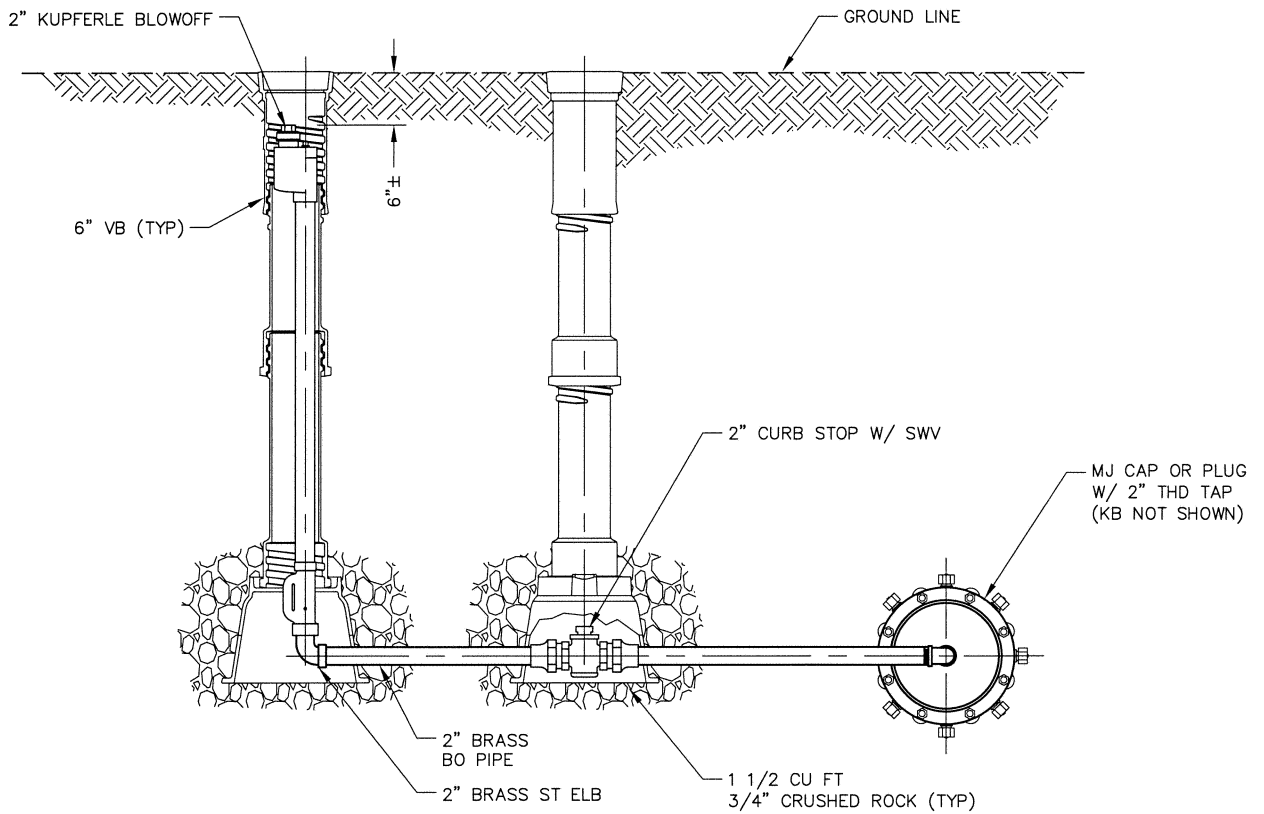

ELEVATION

NOTES:

1. HYDRANT SHALL BE A KUPFERLE FOUNDRY CO TRUFLO MODEL TF 500.
2. THE NORMAL POSITION OF THE TOP OF THE OPERATING NUT IS APPROXIMATELY 6-INCHES BELOW THE TOP OF THE VALVE BOX.
3. INSURE THAT THE HYDRANT IS FREE TO MOVE VERTICALLY WITHIN THE VALVE BOX IN ORDER TO PREVENT TRANSMISSION OF TRAFFIC LOADS TO THE HYDRANT.



**2" BLOWOFF HYDRANT**

Scale: <u>  NONE  </u>	Date: <u>  May 2018  </u>
Drawn: <u>  RLB  </u>	Ck: <u>  K ROSS  </u>
Approved: <u>  [Signature]  </u>	Dr. <u>  127  </u> No. <u>  35  </u>